



**EXTERIOR
EMULSION**



Shade
SELECTION



WEATHER SUPREME

100% ACRYLIC BASED WEATHER
PROOF EXTERIOR EMULSION

Anti Microbiological Property | Anti-Dirt Pick up | Rich Sheen





WEATHER CLASSIC MAX

EXTERIOR EMULSION

Anti Dirt | Water Resistant
Low VOC | Anti Fungal



WEATHER CLASSIC

ALL WEATHER PROOF EXTERIOR EMULSION

Anti Microbiological Property | Anti-Dirt Pick Up
Soft Sheen | Anti-Fading





KAMOSHIELD

EXTERIOR EMULSION

*Economical Exterior Emulsion
Suitable For Dry & Humid Climate*





Corn Flour KE 0025



David KE 0024



Misty Magic KE 0029



Champagne Fizz KE 0028



Cream Double KE 0045



Historic City KE 0027



Gold Sprinkle KE 0031



Porcelain KE 0032



Desert Dune KE 0051



Passion Yellow KE 0067



Charisma KE 0048



Prime Ecru KE 0052



Golden Glow KE 0068



Ginger Dash KE 0034



Virtually Beige KE 0054



Papaya Yellow KE 0069



Ridge Back KE 0057




Belgian Chocolate KE 0037

Super White & Bases are also available.

NATURAL STONES & REDS




Pink Petal KE 0043



Morning Glory KE 0044



Onion Pink KE 0046



Dawn Splendour KE 0026



Peach Schnapps KE 0047



Ophelia KE 0056



Pink Lemonade KE 0050



Ripe Raddish KE 0053



Mocktail KE 0059



Pink Balloon KE 0036



Bougainvillea KE 0070



Red Ribbon KE 0075



Titania KE 0060



Red Cherry KE 0071



* Spl. Signal Red KE 0063



Brown Mushroom KE 0035



Terracotta KE 0061



Ming Red KE 0042

* Spl. Signal Red KE00063 available only in Weather Classic & Weather Supreme.

GREYS, GREENS & BLUES



Silver Sparkle KE 0012



Cucumber Green KE 0002



Resonance KE 0015



Grey Goose KE 0018



Matrix Green KE 0065



Blue Extravagance KE 0013



Steely Blue KE 0011



Fantasy Green KE 0066



Blue Whisk KE 0076



Deep Sea Blue KE 0014



Mehendi KE 0006



Lapis Lazuli KE 0078



Electronic City KE 0016



Pine KE 0008



Royal Blue KE 0020



Wedgewood KE 0019



Safari KE 0004



Revel KE 0021

Shades are shown for indication purpose only.

POPULAR COMBINATIONS



Soft Yellow

2667P



Golden Olive

2672C



Tea Green

KE 0003



Moghul Green

KE 0009



Elisa

2057P



Jamaican Sea

2481D




Foam Green

2932P



Lizard

2937D

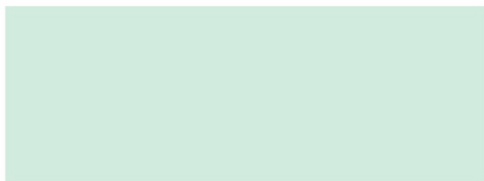

Seabreeze

2477P



Aqua Electra

2468D



Slush

2989P



Blue Rhapsody

2993D

CLASSIC COMBINATIONS



Maize

2030P



April Sun

2034D



Ancient Zuri

KE 0022



Vibrant Orange

KE 0073




Apricot White

KE 0023



Signal Red

KE 0062

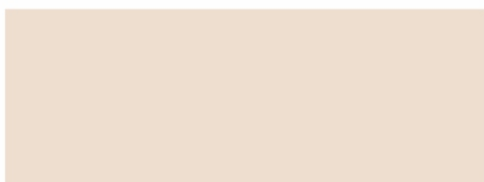


Brown Tint

2890P



Nut Brown

KE 0040

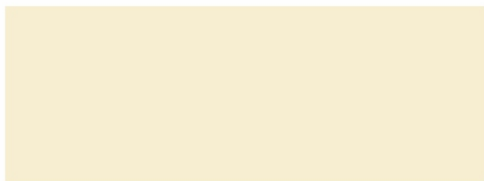

Paper Moon

2029P



Desert Adobe

2175C



Custard

KE 0030



Cinnamon Quill

KE 0039



RECOMMENDED PAINTING SYSTEM

- ▶ **How to Prepare the Surface:** Clean the surface with a wire brush to remove loose paint, dust, grease, algae and fungus. After that, wash the surface down with Kamo Biowash to prevent reoccurrence of microbiological growth.
- ▶ **Smoothering the Surface:** Kamocare/ Kamoplast wall putty is recommended for leveling & smoothering the surface. It is effective in removing holes, dents, cracks and minor undulations. Larger cracks may be filled with a mixture of white cement and sand in the ratio of 1:3.
- ▶ **Priming:** If the surface is highly absorbent, then, once Kamocare/ Kamoplast wall putty is to be applied, you may use Kamo Exterior Sealer. In the case of a fresh surface or repainting surfaces, apply one coat of Kamoprime Exterior Primer in the ratio of 1:1.
- ▶ **Top Coat:** Apply 2 to 3 coats of Weather Supreme/ Weather Classic by diluting 1 litre of it with a maximum 400ml of water. OR apply 2 to 3 coats of Kamoshield by diluting 1 litre of it with a maximum 750ml of water. Keep an interval of 4 to 6 hours between the two coats. An additional coat is required for dark shades and horizontal surface like window tops & ledges, etc.

PRECAUTION

- 01 For freshly plastered surfaces three months are required for curing before the painting of the walls.
- 02 For highly absorbent and chalky surfaces Kamo Exterior Sealer is recommended.
- 03 Paint procedure should not be applied on continuous seeping & damp surface.
- 04 Use of Kamdhenu Exterior Primer is mandatory for all exterior paint surfaces.
- 05 Use Kamdhenu Waterproofing System before painting on the seepage and damp surfaces.

KAMDHENU WATERPROOFING SYSTEM

To prevent recurrence of dampness, sealer, efflorescence and microbiological growth, use following products before painting.

KAMO SHORASEAL Sure protection from Efflorescence.

KAMO PROOF LW in Plaster **KAMO CRETE** with Paint application.



KAMDHENU LIMITED

2nd Floor, Building No. 9A, DLF Cyber City, Phase-III, Gurugram (HR.)-122002

Fax: 0124-4218524, Email: kamdhenu@kamdhenulimited.com

+91-124-4604500 (30 Lines) Toll Free: 1800 1800 545

www.kamdhenupaints.com